



Pneumatic integrated function fittings

PTFIPK - Flow regulator with push-in connection

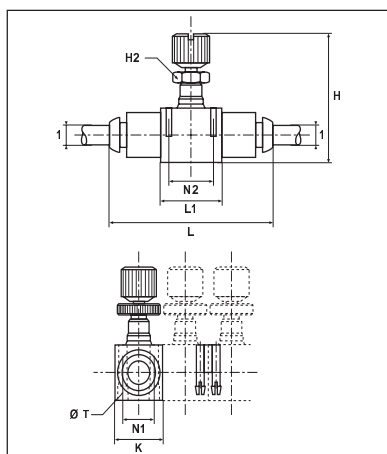


1	Part number	H		H2	K	L	L1	N1	N2	T dia.	Weight g.
		Min.	Max.								
4	PTFIPK4	29.5	33.5	5	12.0	39.0	15	8.0	11.0	2.2	12
6	PTFIPK6	39.5	44.5	8	17.0	55.0	23	11.0	17.0	3.2	30
8	PTFIPK8	44.0	50.0	11	18.5	61.5	26	12.5	20.0	3.2	47
10	PTFIPK10	52.0	61.0	14	24.0	77.0	33	16.0	26.0	4.2	103
12	PTFIPK12	57.5	67.5	14	28.0	87.0	35	20.0	27.5	4.2	138

PTFMIPK - Flow regulator with push-in connection - Ultrafine adjustment

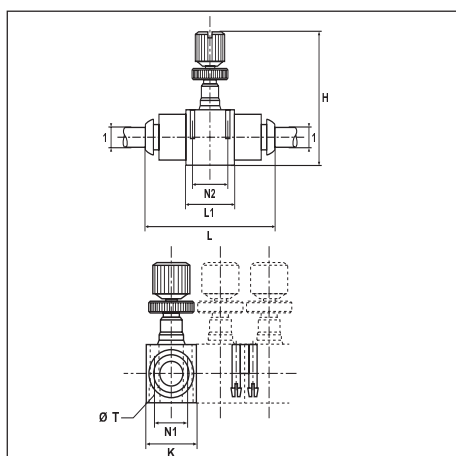

1	Part number	H		K	L	L1	N1	N2	T dia.	Weight g.
		Min.	Max.							
4	PTFMIPK4	34	37.0	12	39	15	8	11	2.2	13
6	PTFMIPK6	42	45.5	17	54	23	11	17	3.2	29

PTFIWPK - Flow regulator with push-in connection - Panel

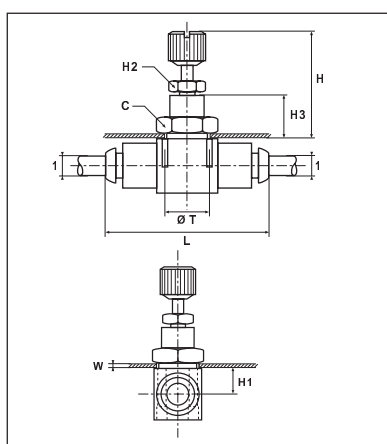

1	Part number	C	H		H1	H2	H3	L	T dia.	W Max.	Weight g.
			Min.	Max.							
4	PTFIWPK4*	14	21.5	25.5	6.5	-	11.0	39.0	10.5	6	12
6	PTFIWPK6*	19	27.5	32.5	7.5	-	13.5	54.0	16.5	7	30
8	PTFIWPK8	24	28.5	34.5	9.0	11	13.5	60.5	18.5	7	47
10	PTFIWPK10	30	29.5	38.5	11.5	14	13.5	76.0	24.5	7	103
12	PTFIWPK12	32	32.0	42.0	12.5	14	15.5	86.0	27.5	8	138

* Ultrafine adjustment

Parker Prestoflow with push-in connections are designed to be used with Parker calibrated polyamide or polyurethane tubing. See Thermoplastic singles tubes & Pneumo-Tube bundles section (P).

For product availability please consult our price list 0093-UK.

Dimensions shown may be changed at any time without prior notice.