




LIBECCIO EN ISO 3861

Exceeds the requirements of EN ISO 3861

Hose Construction

- Tube:** Smooth, black, antistatic, abrasion resistant BR/NR rubber compound, abrasion ISO 4649: max 60 - 70 mm³
- Reinforcement:** Synthetic textile fabrics
- Cover:** Black, smooth, antistatic, weather and abrasion resistant SBR/NBR compound. The cover is pinpricked to prevent blistering and bubbling, max. resistance on finished hose: 2,0 MΩ/m

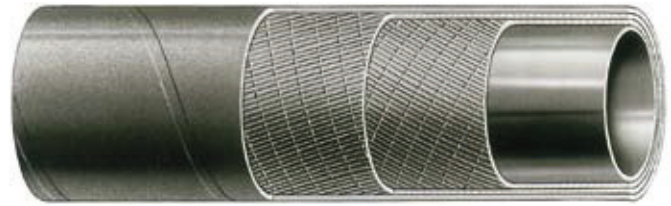

Tolerances

- On inside diameter:**
According to UNI EN ISO 1307/97
- On outside diameter:**
RMA steel mandrel: $\pm 1,59$ mm
- Length tolerance:** ± 1 %

Applications

Suitable for conveying of wet and dry sand and grit blasting materials.

Temperature Range

-30 °C (-22 °F) to +70 °C (+158 °F)

Note

Available on request:
LIBECCIO EN ISO 3861/E with built-in copper wires to provide electrical continuity between both ends.

Safety note

This hose is manufactured to carry a working pressure of 10 bar, but the EN ISO 3861 prescribes a max. W.P. of 6.3 bar.

IHXXXXXXXXXX Part Number / Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
LIBECCIO EN ISO 3861										
IH36820200/40	25	40	1,0	150,0	10	4,0	600,0	40	0,92	250
IH36820201/40	30	45	1,0	150,0	10	4,0	600,0	40	1,05	300
IH36820202/40	32	48	1,0	150,0	10	4,0	600,0	40	1,37	320
IH36820205/40	35	54	1,0	150,0	10	4,0	600,0	40	1,56	350
IH36820204/40	40	60	1,0	150,0	10	4,0	600,0	40	1,85	400
IH36820206/40	50	72	1,0	150,0	10	4,0	600,0	40	2,54	500
IH36820207/40	60	82	1,0	150,0	10	4,0	600,0	40	2,95	600
IH36820209/20	80	105	1,0	150,0	10	4,0	600,0	40	4,32	800
IH36820210/20	90	115	1,0	150,0	10	4,0	600,0	40	4,84	900
IH36820211/20	100	125	1,0	150,0	10	4,0	600,0	40	5,30	1000
LIBECCIO L EN ISO 3861										
IH36820300/40	19	33	1,0	150,0	10	4,0	600,0	40	0,69	190
IH36820301/40	25	39	1,0	150,0	10	4,0	600,0	40	0,84	250
IH36820303/40	38	55	1,0	150,0	10	4,0	600,0	40	1,46	380
IH36820305/40	42	60	1,0	150,0	10	4,0	600,0	40	1,70	420
IH36820306/40	50	70	1,0	150,0	10	4,0	600,0	40	2,28	500
IH36820307/40	60	80	1,0	150,0	10	4,0	600,0	40	2,66	600

RUBBER HOSE LIBECCIO EN ISO 3861 ID mm - WP 1,0 MPa - BP 40 MPa ABRASION 60/70 mm³ MADE IN ITALY Parker ITR