




CEMENT 713 10

Hose Construction

- Tube:** Smooth, black, antistatic, abrasion resistant BR/ NR rubber compound.
Abrasion: max 60-70 mmc
- Reinforcement:** Synthetic textile fabrics and built-in copper wire giving electrical continuity between both ends.
- Cover:** Black, abrasion and weather-resistant, SBR rubber compound.

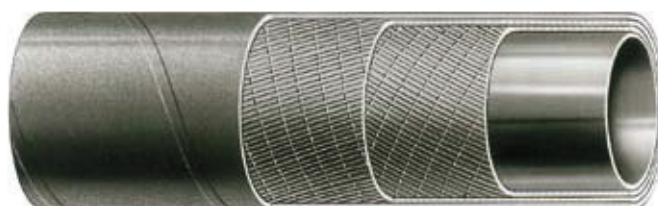

Tolerances

- RMA steel mandrel
- On inside diameter:** $\pm 1,59$ mm
- On outside diameter:** $\pm 1,59$ mm
- Length tolerance:** ± 1 %

Applications

Suitable for delivery of dry cement, grain, seeds and animal feed to road tankers and storage bins or silos.

Temperature Range

-30 °C (-22 °F) to +70 °C (+158 °F)

IHXXXXXXXXXX Part Number/ Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
IH36822223/40	50	68	1,0	145,0	10	3,0	450,0	30	2,04	600
IH36822224/40	60	78	1,0	145,0	10	3,0	450,0	30	2,38	720
IH36822225/40	63,5	81	1,0	145,0	10	3,0	450,0	30	2,49	760
IH36822226/40	75	85	1,0	145,0	10	3,0	450,0	30	1,64	—
IH36822217/40	75	93	1,0	145,0	10	3,0	450,0	30	2,92	900
IH36822222/40	80	98	1,0	145,0	10	3,0	450,0	30	3,10	960
IH36822230/40	90	110	1,0	145,0	10	3,0	450,0	30	3,90	1080
IH36822233/40	100	112	1,0	145,0	10	3,0	450,0	30	2,54	—
IH36822220/40	100	120	1,0	145,0	10	3,0	450,0	30	4,29	1200