


# AUTOGENE EN 559 NR/ - NB/L 20

Hose according to EN 559

## Hose Construction

- Tube:** Black, smooth SBR rubber compound, resistant to Welding Gases and not suitable for LPG, good resistance to ignition
- Reinforcement:** Synthetic textile yarns
- Cover:** Smooth (/L) or ribbed (/R), red (NR) or blue (NB), SBR/EPDM rubber compound resistant to abrasion, ageing, hot surfaces and incandescent particles

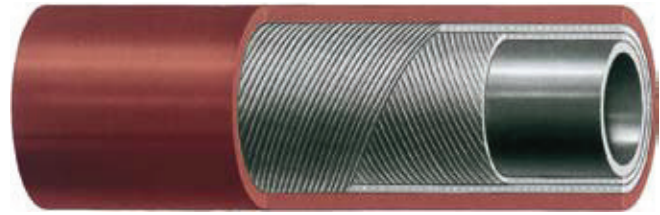

## Tolerances

- EN 559
- On inside diameter:**
- ≤ I.D. 6,3 mm: ± 0,40 mm
  - I.D. 8 - 10 mm: ± 0,50 mm
- Length tolerance:**
- UNI EN ISO 1307/97 ± 1 %

## Applications







Designed for delivery of welding and allied process gases.

## Important!

Welding applications can be hazardous. Please take all the necessary safety precautions.

## Temperature Range

-25 °C (-13 °F) to +80 °C (+176 °F)

IHXXXXXXXXXX Part Number / Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
<b>AUTOGENE EN 559 NR/L 20</b>										
IH30412900/40	5	12	2,0	300,0	20	6,0	900,0	60	0,13	40
IH30412900/100	5	12	2,0	300,0	20	6,0	900,0	60	0,13	40
IH30412803/40	6,3	13,3	2,0	300,0	20	6,0	900,0	60	0,15	40
IH30412803/100	6,3	13,3	2,0	300,0	20	6,0	900,0	60	0,15	40
IH30412806/40	6,3	16,3	2,0	300,0	20	6,0	900,0	60	0,25	40
IH30412806/100	6,3	16,3	2,0	300,0	20	6,0	900,0	60	0,25	40
IH30412914/100	8	15	2,0	300,0	20	6,0	900,0	60	0,17	40
IH30412716/40	9	16	2,0	300,0	20	6,0	900,0	60	0,19	45
IH30412716/100	9	16	2,0	300,0	20	6,0	900,0	60	0,19	45
IH30413221/40	10	17	2,0	300,0	20	6,0	900,0	60	0,20	50
IH30413221/100	10	17	2,0	300,0	20	6,0	900,0	60	0,20	50
<b>AUTOGENE EN 559 NB/L 20</b>										
IH30412901/40	5	12	2,0	300,0	20	6,0	900,0	60	0,13	40
IH30412901/100	5	12	2,0	300,0	20	6,0	900,0	60	0,13	40
IH30412703/40	6,3	13,3	2,0	300,0	20	6,0	900,0	60	0,15	40
IH30412703/100	6,3	13,3	2,0	300,0	20	6,0	900,0	60	0,15	40
IH30412706/40	6,3	16,3	2,0	300,0	20	6,0	900,0	60	0,25	40
IH30412915/100	8	15	2,0	300,0	20	6,0	900,0	60	0,17	40
IH30412707/40	9	16	2,0	300,0	20	6,0	900,0	60	0,19	45
IH30412707/100	9	16	2,0	300,0	20	6,0	900,0	60	0,19	45
IH30413220/40	10	17	2,0	300,0	20	6,0	900,0	60	0,20	50
IH30413220/100	10	17	2,0	300,0	20	6,0	900,0	60	0,20	50

RUBBER HOSE – EN 559 – 2 MPa (20 bar) – I.D. MADE IN ITALY – Parker ITR (Year with traceability code)

RUBBER HOSE – EN 559 – 2 MPa (20 bar) – I.D. MADE IN ITALY – Parker ITR (Year with traceability code)